

TRIPLE INSTRUMENT INSTRUCTIONS

CAT. #A3T13-3-182


FUEL LEVEL
E-F 240-34 OHMS

IMPORTANT !

For use with float senders only.

240-34 ohms

NOT CERTIFIED FOR USE ON
TYPE CERTIFIED AIRCRAFT.

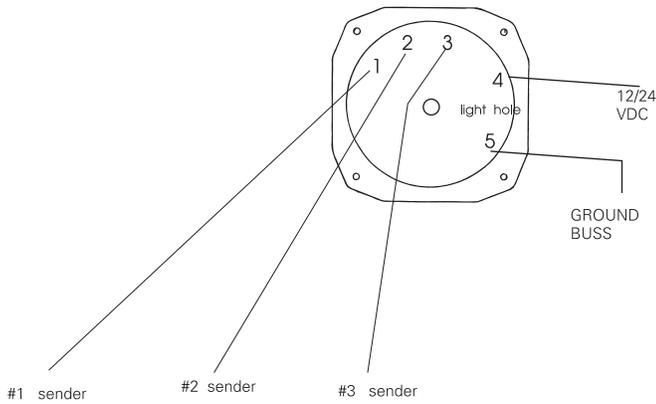

Install instrument in a 3-1/8 inch hole for behind panel or (2-7/8 inch hole for front panel). Use 4 corner screws to hold in place. Mount in convenient operating place at least 12 inches from compass.

Install the fuel senders into fuel tanks, follow fuel level sender instructions. Route wires away from spark plug wires and hot manifolds, support with wire ties every 12-15 inches. Use rubber grommets when going through metal.

On the rear of the instrument there are connecting pins with corresponding numbers.

Use patch cable provided to connect the instrument to the appropriate senders and power source. Connect pin #1 to the #1 fuel sender as per fuel sender instructions. Connect pin #2 to the #2 fuel sender as per fuel sender instructions. Connect pin #3 to the #3 fuel sender as per fuel sender instructions. Connect pin #5 to one of each of the fuel sender black wires or to a ground buss. Connect pin #4 to 12 or 24 volts dc.

WARRANTY

WESTACH INSTRUMENTS are made with the highest quality material and workmanship. With reasonable care, instruments will give long and satisfactory service. WESTACH INSTRUMENTS are guaranteed against defective material and workmanship for 12 months from the manufacturing date. For complete details go to www.westach.com

WESTACH
©

WESTBERG MFG. INC.
www.westach.com