


# INSTRUCTIONS

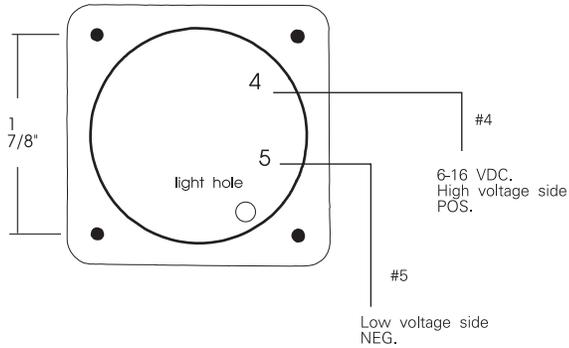

**CAT. # 2A5**  
**SINGLE INSTRUMENT**

VOLTS  
6-16 VDC

**! IMPORTANT !**

For lighting order light kit # 186 ( 12 vdc )

If no reading. Check all connections.

Check vehicle equipment wiring instructions for proper wiring.

Install the instrument in a 2-1/4 hole in convenient operating place. Use 4 corner screws to hold in place.

On the rear of the instrument there are connecting pins with corresponding numbers or a 2 pin AMP connector. Use patch cable provided to connect the instrument to the appropriate power source. See illustration.

Connect pin #5 to the low volt side. Connect pin #4 to 6-16 volts D.C. high volt side.

See illustration.

Patch cable may be shortened or lengthened without affecting accuracy of unit. Using 20-22 gauge stranded wire is recommended.

## WARRANTY

WESTACH INSTRUMENTS are made with the highest quality material and workmanship. With reasonable care, instruments will give long and satisfactory service. WESTACH INSTRUMENTS are guaranteed against defective material and workmanship for 12 months from the manufacturing date. For complete details go to [www.westach.com](http://www.westach.com)

**WESTACH**  
©

**WESTBERG MFG. INC.**  
[www.westach.com](http://www.westach.com)